



## ALTURAS 3 LIGHT PENDANT

6624603

### General Product Information



### Tools Required



### Safety Information

#### CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


**USE MINIMUM 90°C SUPPLY CONDUCTORS.**



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



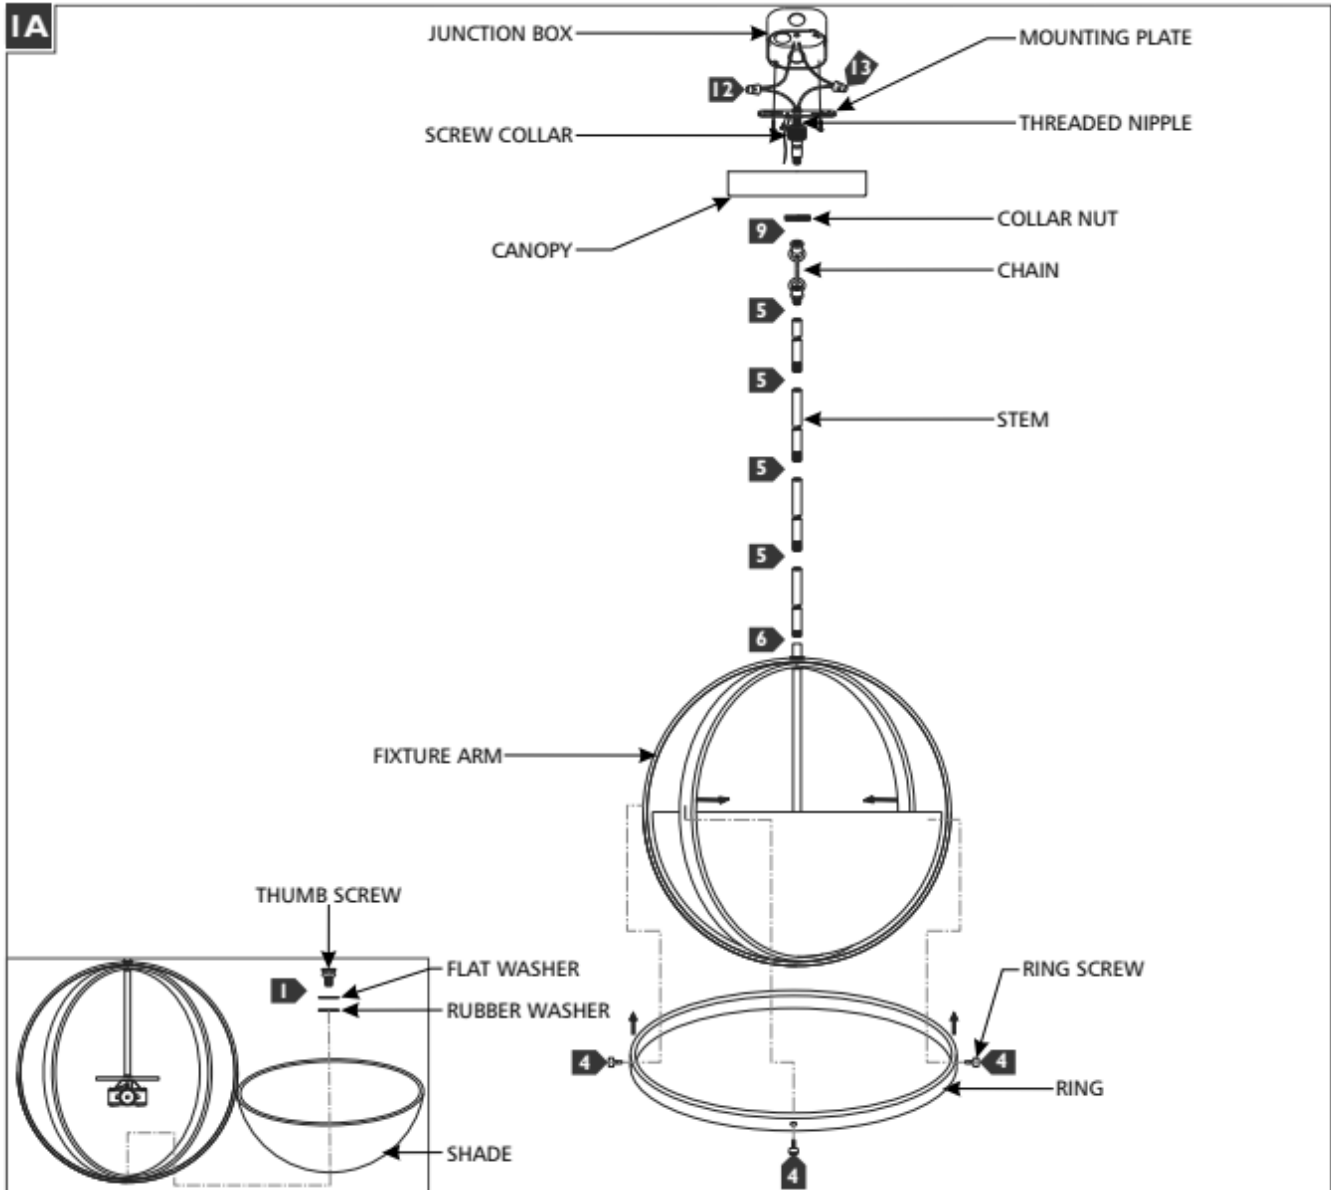

## INSTRUCTIONS

### I. Preparing the Fixture

1. Place the shade inside the fixture arms and secure in place with the rubber washer, flat washer, and thumb screw in that order.
2. Spread the fixture arms until they are equally spaced apart.
3. Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage Information.
4. Align the holes on the ring with the holes on the fixture arms and secure the ring in place with the ring screws.
5. Determine the desired height or look of the fixture with the provided stems and/or chain and assemble them by screwing them together. All parts may be used alone or in combination.
6. Feed the fixture wires through the stems/chain and screw the assembly to the fixture.
7. Unscrew the collar nut off the screw collar and place it onto the stem/chain followed by the canopy.
8. If necessary, screw the threaded nipple tightly onto the mounting plate.
9. Feed the fixture wires through the threaded nipple and screw the mounting plate assembly onto the stem/chain assembly.
10. Align and secure the mounting plate to the junction box.

## II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around, or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) White fixture wire to neutral power line wire
  - b) Black fixture wire to hot power line wire
4. Neatly place all wires into the junction box, place the canopy onto the ceiling, and secure in place by screwing the collar nut tightly onto the screw collar.