


Serenity




Colors




White
VTL STWH

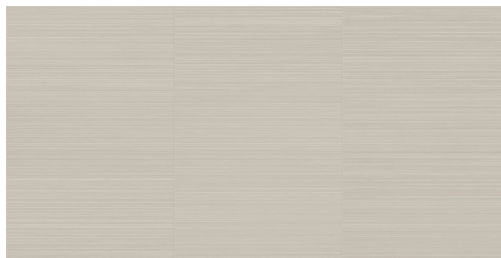

Gray
VTL STGR

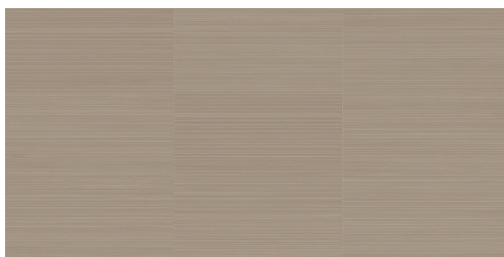

Taupe
VTL STTA

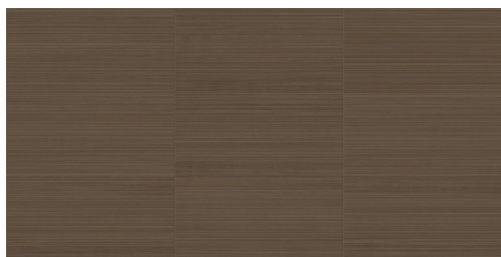


Brown
VTL STBR

Sizes



12" x 24" x 9mm
Rectified



6" x 24" x 9mm
Rectified

Field Tiles*

SIZE	ACTUAL	THICKNESS	FINISH
12" x 24" Rectified	11.69" x 23.47"	9.00mm	Matte/Natural
6" x 24" Rectified	5.70" x 23.47"	9.00mm	Matte/Natural
* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.			

Mosaics & Coordinating Trims*

SIZE	ACTUAL	FINISH
6" x 12" Cove Base	6.00" x 12.00"	Matte/Natural
3" x 24" Bullnose	3.00" x 24.00"	Matte/Natural
2" x 2" Mosaic	12.00" x 12.00"	Matte/Natural
Recommended Grout Joint: 1/8" - Rectified 3/16" - Non Rectified		

Product Characteristics

MATTE/NATURAL	
Breaking Strength (ASTM C648 or ISO 10545-4)	≥400 lbs
Chemical Resistance (ASTM C650 or ISO 10545-13)	Resistant
DCOF	≥0.42
Deep Scratch Resistance - Unglazed (ISO 10545-6)	N/A
Frost Resistance (ASTM C1026 or ISO 10545-12)	Resistant
Mohs Hardness - EN101	6
Water Absorption (ASTM C373 or ISO 10545-3)	≤0.5%
Certifications	N/A
Country of Origin	USA
Shade Variation Code	V2

Application**

		WALL	FLOOR
Interior	Residential	•	•
Interior	Commercial	•	•
Interior	Heavy Commercial	•	
Exterior	Residential/Commercial	•	

** These recommendations are not defined by ANSI Standards

Material

Glazed Color-Body Porcelain



Made in USA



Stock and Ready Ship



V2 Slight Variation



DCOF: ≥0.42



Scan QR Code for
Product Information and
Installation Images

Request samples.

www.vitlsurfaces.com
samples@vitlsurfaces.com

