

The flexibility of Expanse® gives an elegant look to surfaces for commercial and residential interior and exterior installations. This beautiful and unique large format tile offers a seamless look to floors and walls.

**EXPANSE®**  
*Glazed & Thin Tile Porcelain*






Massa Gold | 63"x126"



Venato | 63"x126"

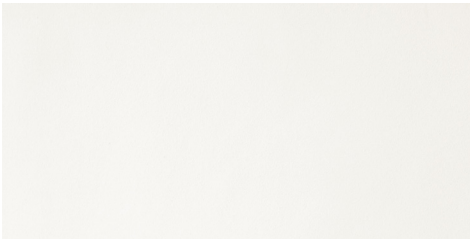

Puro Bianco | 59"x118"



Arabesco White | 47"x110"



Lassa White | 47"x110"



Network Silver | 63"x126"








Network Gray | 63"x126"



Hangar Ash | 63"x126"




Hangar Smoke | 63"x126"

Sizes							
	63"x126" 62.91"x125.91" (Massa Gold, Venato)	47"x110" 47.13"x110.12" (Arabesco White, Lassa White)	63"x126" 62.91"x125.91" (Network)	63"x126" 62.91"x125.91" (Hangar)	59"x118" (Puro Bianco)		
Thickness	6.5mm	6mm	6mm	7mm	Check Website		
Faces	4	4	3	2	Check Website		
Finish	Polished	Polished (Arabesco & Lassa) Matte (Lassa)	Matte	Matte	Polished		
Edge	Rectified	Rectified	Rectified	Rectified	Rectified		
Grout Joint Recommendation	1/8"	1/8"	1/8"	1/8"	1/8"		
Testing	Deep Abrasion Resistance C1243	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A137.1	Scratch Hardness MOHS	Shade Variation Rating
Results*	1	≥250 lbf	Resistant	≤0.50%	≥0.60 (Matte) <0.42 (Polished)	6	V2

**Product and Installation Details** | ANSI A108.02  
Section 4.3.8.2 - For running bond/brick joining patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



-  **Sustainability Attributes**
  - Red List Free
  - Health Product Declaration (HPD) provided upon request
  - Product Packaging is 100% recyclable
- VOC Free
  - Recycled content varies by color, please check website for updated information.

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.