

TECHNICAL DATA SHEET

TDS-KD-38-S1


Date: 10/20/2020 Version: 1

Cap size: 38mm PLCT

Description: Plastisol lined Continuous Thread (CT) cap with BPA-ni interior coatings, made for sealing glass jars containing food or juice.

DIMENSIONS

Glass Finish:	GPI 400 & GPI 400M
A (Plug Dia.)	1.385/1.402"
B (Outside Dia.)	1.577/1.614"
C (Overall Height)	.392/.412"
D (Compound Thickness)	.026/.049"

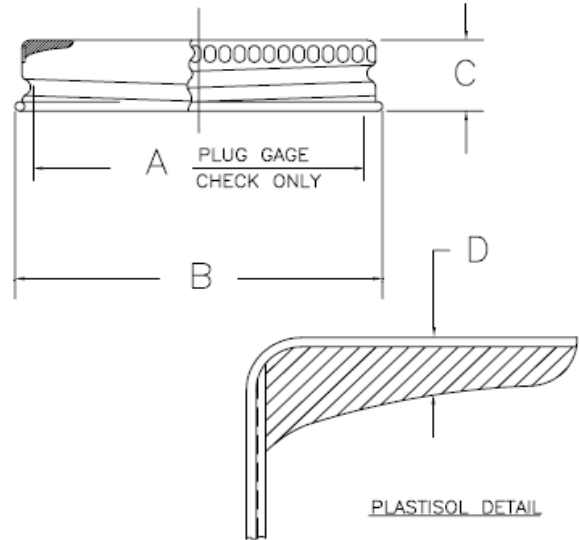

Materials

- Electrolytic tin plate or Tin free Steel**
 - Minimum Nominal Thickness: .0080" (73 lb.)
- Interior Coating**
 - Food grade interior coating system specified according to product requirement. (FDA compliant, BPA Non-Intent)
- Exterior Coating**
 - White, clear or gold base coat with over varnish as required
 - Printing decoration according to customer specification.
- Compound**
 - Food grade plastisol according to thermal process (pasteurization, hot fill and cool, dry seal, retort) and product type (oily and non-oily). (FDA compliant)

	Yes	No	NOTES:
Pasteurization***	X*		1)
Hot Fill***	X		2)
Retort***		X	3)

*** **Note:** Crown will recommend the compound and coating system but the customer must make the final decision.

PACKAGING

Carton		Pallet	
Size L x W x H (in)	20 x 11.5 x 16	Size L x W x H (in)	40 x 48 x 85
Caps Qty.	3,400	Cartons per pallet	40
Gross Weight (lb)	38.6	Caps per pallet	136,000

Note: Quantity of closures in cartons may vary dependent upon manufacturing plant. For confirmation, contact your CROWN representative. Alternative packing available.

Stacking: Cap cartons should not be stacked more than 2 pallets high

Storage conditions: Temperature range from 40 - 86°F (5 - 30°C) - relative humidity below 70%.
Closures should be used within 2 years of the manufacturing date on the carton (Deviation granted under Crown's approval).

DISCLAIMER

This specification does not relieve the customer of their ultimate responsibility for the determination of the appropriate container. It is the customer's responsibility to select the appropriate packaging based upon all information at their disposal including the specific application, regulatory compliance, product compatibility and shipping requirements. WE HEREBY DISCLAIM AND EXCLUDE ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING WITHOUT LIMITATION THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

DISTRIBUTED BY:



REF NO.:

DWG31990

DESCRIPTION:

38-400 Metal Screw Cap, No Button with Plastisol Liner