



ASSEMBLY AND INSTALLATION INSTRUCTIONS

C0324 / C0325

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. Read and save these instructions.

Hardware Package (included):

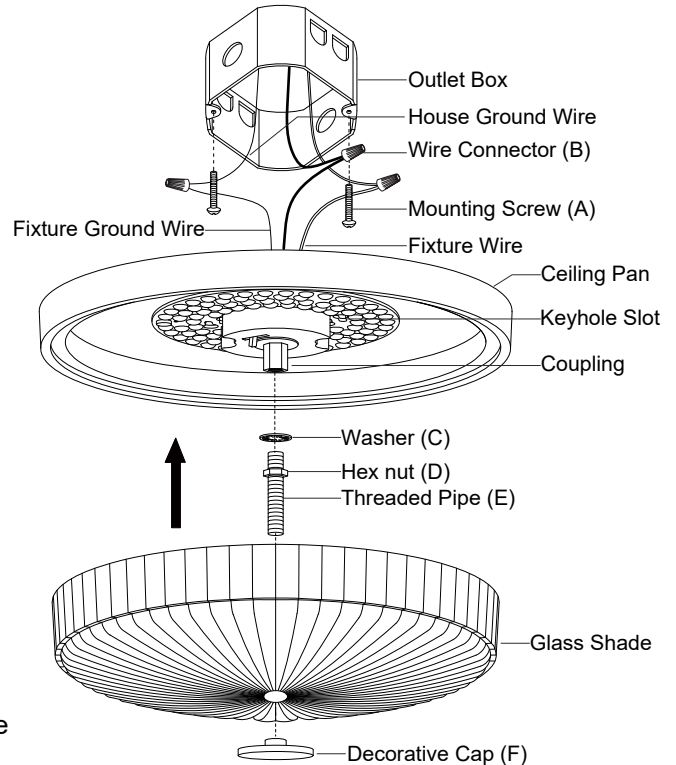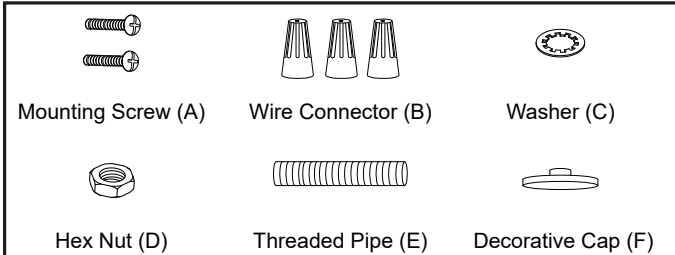

Installation Steps


Turn off the power at fuse or circuit box

1. Attach the two mounting screws (A) to the holes on outlet box, thread them in part way: 2 to 3 turns only.
2. Pull out the source wires from the outlet box. Make wire connections using wire connectors (B) as follows:
 - Connect the hot wire (black insulation) from the fixture to the black wire from the power source.
 - Connect the neutral wire (white insulation) from the fixture to the white wire from the power source.
 - Attach the fixture ground wire (bare wire) to the house ground wire with the wire connector (B).Carefully put all of the wires back into the outlet box.
3. Attach the ceiling pan to the outlet box by inserting mounting screws (A) heads into the keyhole slots on ceiling pan and rotate the ceiling pan until it locks in place, then secure the mounting screws (A) tightly.
4. Attach the threaded pipe (E) into the coupling of the ceiling pan and secure the washer (C) and hex nut (D).
NOTE: Depth of threaded pipe may need to be adjusted to properly fit glass shade and decorative cap.
5. Attach the glass shade to the ceiling pan by inserting the threaded pipe (E), then secure it with decorative cap (F).

Turn on the power at fuse or circuit box

Adjusting the Correlated Color Temperature (CCT) of the Light

Customize the correlated color temperature (CCT) of the LED light by moving the toggle switch (For Reference).

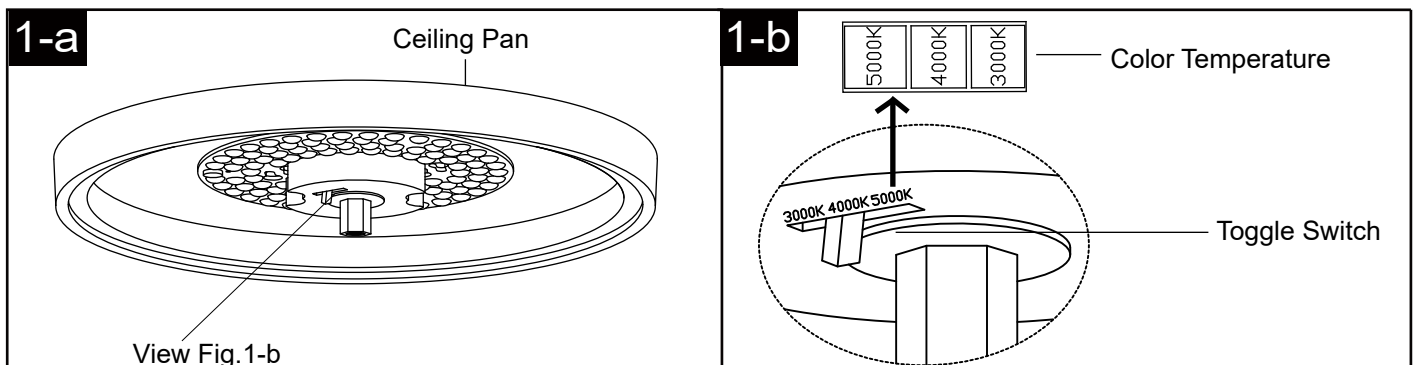

- Move the toggle switch to 3000K, the color temperature is set at Soft White.
- Move the toggle switch to 4000K, the color temperature is set at Bright White.
- Move the toggle switch to 5000K, the color temperature is set at Daylight.



Notice: Please move the toggle switch to make your selection before attaching glass shade to the ceiling pan.

Note: Dimming range: 100% full illumination to 10% of full illumination.

This fixture is dimmable with a forward phase electronic dimmer. Dimmers tested to be compatible with this fixture are the Lutron: TGCL-153PH, MACL-153MH, SCL-153P, DVWCL-153PH.

If you are unfamiliar with electrical installations, it is recommended you have a qualified electrician for your installations.

The following parts are available for reorder if damaged or missing.

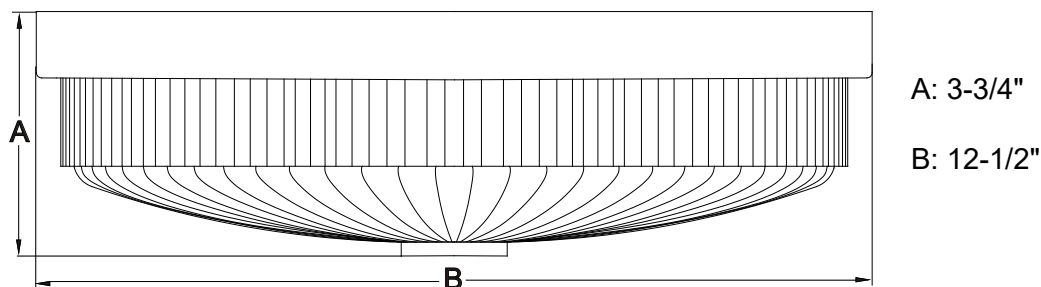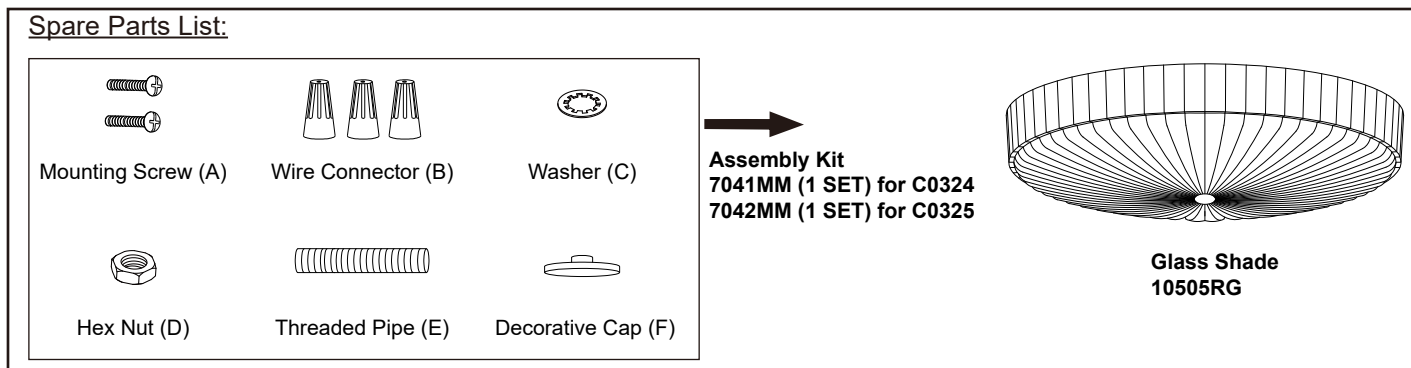

5 Year Limited Warranty

Vaxcel warrants all of our products against defects in workmanship and finishes for one year following the date of shipment.

In addition:

- Any product with an integrated motion sensor or dusk-to-dawn photocell is supported by a 5-year warranty for the functionality of the product.
- Any product with integrated LED modules is covered by a 5-year warranty on the LED functionality.

Exclusions: This warranty does not include the failure of products from extreme acts of nature; environmental conditions not suited for the products intended use; operation in temperatures outside of the range specified in the instruction manual; usage with improper power supply, power surges or dips. For coastal locations, some corrosion is considered normal for the environment.

Vaxcel reserves the right to repair, replace or issue a credit for any properly installed product, provided it is returned per RMA instruction. This warranty is limited to the cost of the product only and does not extend to transportation, installation or replacement costs.

How can warranty service be obtained?

info@vaxcel.com
1-800-482-9235