
ASSEMBLY AND INSTALLATION INSTRUCTIONS

P0211 / P0212 / P0213 / P0214 / P0215 / P0216

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.

Hardware Package (included):


Mounting Plate (A)


Mounting Screw (B)


Wire Connector (C)


Fixture Mounting Screw(D)


Green Grounding Screw (E)


Lock Nut (F)


Ball Nut (G)


Warning: LED electronics can be damaged by electro static discharge (ESD)shock. Before installation, discharge yourself by touching a grounded bare metal surface to remove this hazard. To avoid damage, do not touch the LED module.

Installation Steps

Turn off the power at fuse or circuit box

1. Attach two fixture mounting screws to the mounting plate, and then secure it with two lock nuts. Adjust the length of the fixture mounting screws if necessary.
2. Attach the mounting plate to the outlet box using two mounting screws.
3. Rod Connections:
   a. Thread the fixture wires from the fixture through the lower rod, and then secure the lower rod onto fixture using the threaded pipe.
   b. Thread the fixture wires through the middle rod, and then secure the middle rod onto the lower rod using the threaded pipe.
   c. Thread the fixture wires through the upper rod, and then secure the upper rod onto the middle rod using the threaded pipe.
   d. Thread the fixture wires through the fixture canopy, and then secure the fixture canopy onto the upper rod using the threaded pipe.

Note: Height adjustable from
(16" to 69" for P0211 P0212 P0213)
(13" to 66-1/2" for P0214 P0215 P0216).
Use fewer rods if shorter length is desired

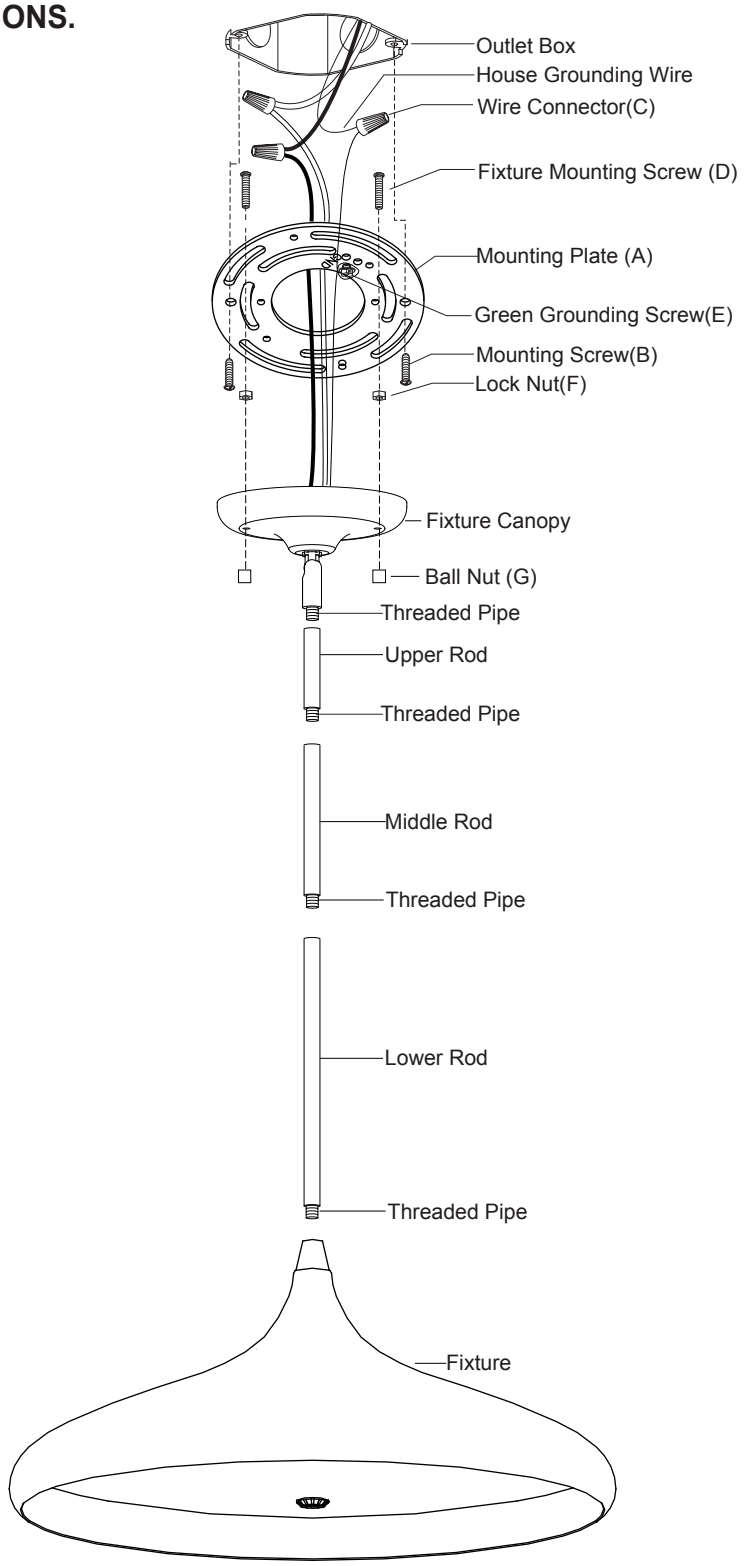


VAXCEL

161120

4. Pull out the source wires from the outlet box. Make wire connections using wire connectors as follows:
   ---Connect the black wire from the fixture to the black wire from the power source.
   ---Connect the white wire from the fixture to the white wire from the power source.
   ---Attach the fixture grounding wire to the mounting plate with the green grounding screw, and then connect it to the house grounding wire with a wire connector.
   Carefully put the wires back into the outlet box.
5. Attach the fixture canopy to the mounting plate by inserting the fixture mounting screws, and then secure it with two ball nuts.
6. Angled mounting recommended for a vaulted or angled ceiling. (See Fig. 1)


Fig. 1

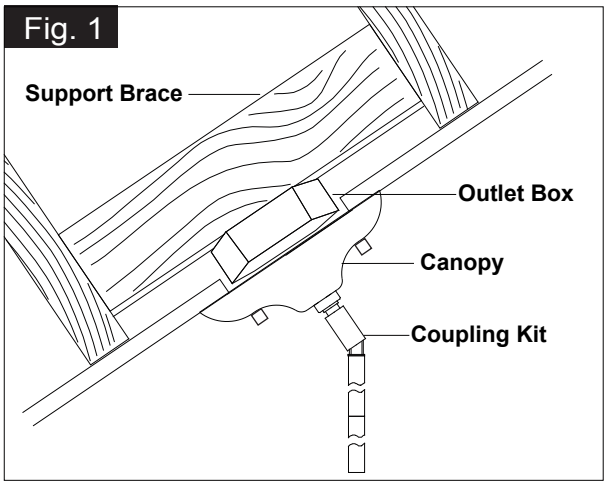

Turn on the power at fuse or circuit box


Function and Operation

ON-OFF

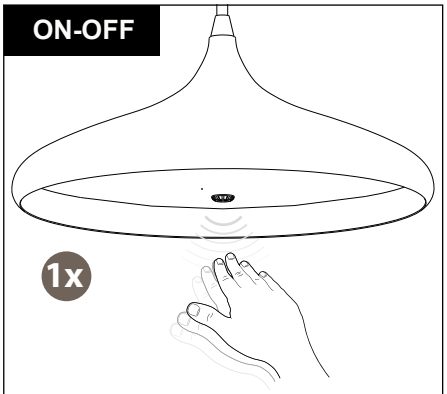


TURNING LIGHTS ON, OFF
Wave hand under 4 inches of sensor once to turn light on or off.

DIMMING

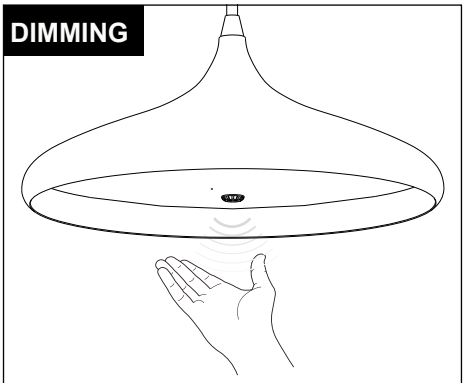

DIMMING LIGHTS
Hold hand under 4 inches of sensor to adjust brightness.
NOTE: Dimming ranges from 100% to 5% brightness.


LOCK-UNLOCK

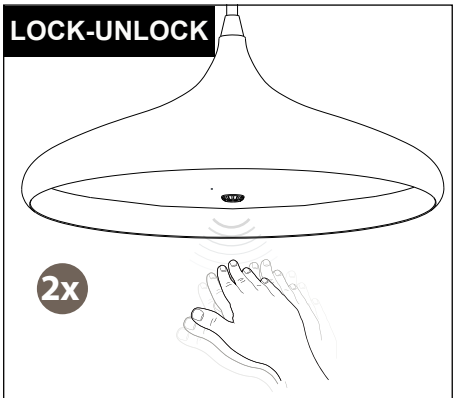

LOCK / UNLOCK LIGHT
Wave hand under 4 inches of sensor within 0. 5 seconds twice to lock or unlock sensor.

The following parts are available for re-order if damaged or missing.

Spare Parts List:



Mounting Plate (A)



Mounting Screw (B)



Wire Connector (C)



Fixture Mounting Screw(D)

Green Grounding Screw (E)




Lock Nut (F)



Finial (G)

Mounting Hardware
(1 SET)
5676MM For P0211 / P0214
5677MM For P0212 / P0215
5670MM For P0213 / P0216

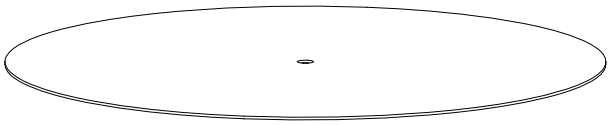

PC Diffuser X1
9864AC For P0211/P0212/P0213
9865AC For P0214/P0215/P0216




Lock Ring X1
7151LR




Driver X1
7253DD For P0211/P0212/P0213
7152DD For P0214/P0215/P0216

VAXCEL

5-YEAR LIMITED WARRANTY:
All products are warranted to be free of defects in material and workmanship for five (5) years from date of purchase. This warranty is limited to the correction of any such defect, or the replacement of any such defective item(s), provided that: (a) we are properly notified and consent to return of the item(s) in question:(b) the item(s) is / are returned with proof of purchase date; and (c) it is found upon inspection by us that the item(s) is / are defective as noted above. This warranty does not cover labor costs, consequential damages, nor does it apply to any item(s) that have been improperly installed, overloaded, altered, or otherwise abused by the customer, its agent(s) or employee(s). Finishes are specially excluded from the terms of this warranty since they are subject to environmental maintenance deemed beyond our control. Other than the described obligation, we assume no further liability with respect to the sale or use of our products.We make no warranty, express or implied, and disclaim any warranty of merchantability or fitness for a particular purpose.

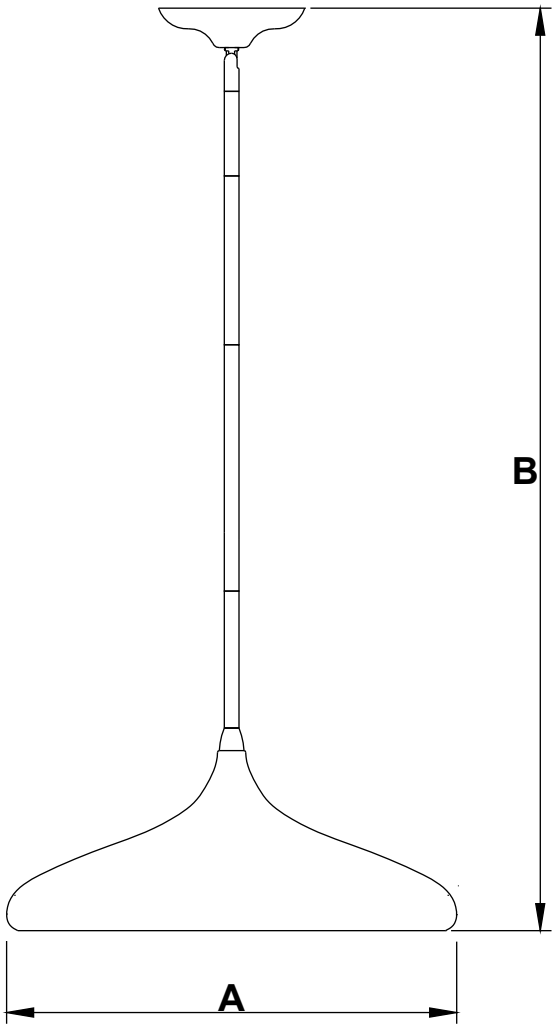

P0214/P0215/P0216
A: 16"
B: 13"-66-1/2"

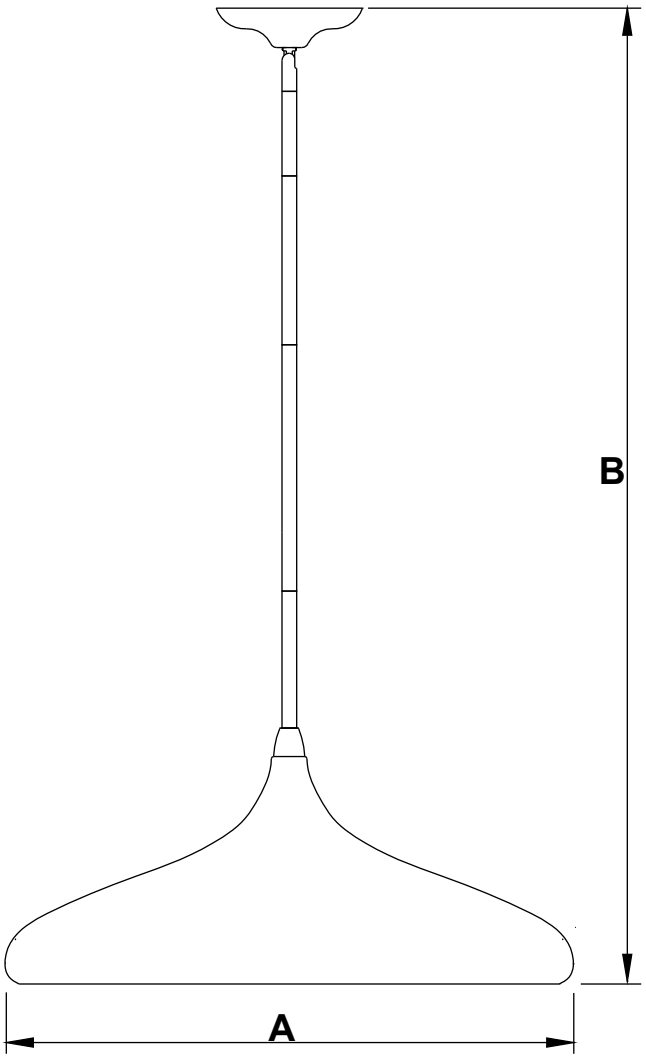

P0211/P0212/P0213
A: 21"
B: 16"-69"

VAXCEL
161120