

# Calabria

## Contemporary Style Ceiling Fan

### Product Description

The Calabria(MFC) a Contemporary-style ceiling fan is designed with efficiency and flexibility in mind. This fan boasts a quiet AC motor with three adjustable speeds and a reversible feature for year-round comfort, effortlessly switching between downdraft mode for cooling in the summer and updraft mode for warmth during the winter. Its versatile mounting system accommodates standard and angled installations, while the blades are expertly crafted from durable plywood at a 12° pitch. The fan operates at a standard 120VAC input voltage and offers two light kit options, including an integrated LED light kit, or the choice to go without a light kit. For convenient control, the fan includes a standard pull chain, with the added option of remote and wall switch controls. Elevate your home with this ceiling fan, blending practicality and style seamlessly.

#### Fan Motor

- A variable 3-speed reversible motor
- AC Motor | 153 x 15mm motor | 3 Capacitor
- Motor Wattage: 57W
- 54 in Lead Wire | 6 in down rod included

#### Blades

- Blade is constructed from High-Quality Plywood.
- 12° pitch

#### Electrical

- Input voltage 120VAC

#### Light Kit

- There are 2 options available one with integrated LED light kit and without light kit.

#### Controls

- Standard pull chain control with optional remote and wall switch controls.

#### Optic Lens

- White Glass

#### Listings

- ETLus listed for dry location

#### Warranty


- Fan Motor: Lifetime Warranty
- Light Kit: 1 Year Limited Warranty
- Lamps: 1 Year Limited Warranty
- Warranty does not cover product failure due to an overvoltage event (power surge.) For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

Project

Catalog

Type

Date

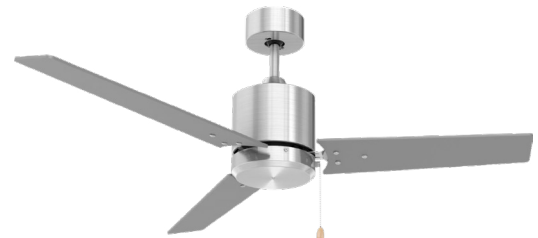

3-Blade Ceiling Fan without Light



3-Blade Ceiling Fan



4-Blade Ceiling Fan



5-Blade Ceiling Fan

## MFC Contemporary Style Ceiling Fan 3-Speed | Reversible



## Ordering

### Ordering Information


Example: 52MFC1120LED3RCNKNK

Sweep	Series	Version	Voltage	Light Source	No. of Blades	Control	Housing Finish	Blade Finish
52	MFC	1	120	LED (Integrated)	3	_blank (Pull Chains)	WH (White)	WH (White)
				N (none)	4	RC (Remote Control)	BK (Black)	BK (Black)
					5	WC (Wall Control)	NK (Brushed Nickel)	WT (Walnut)
								NK (Brushed Nickel)

Specifications and dimensions subject to change without notice. Please refer to the website for the most up-to-date information.

## Dimensions

Dimensions			
	Height (H <sup>1</sup> )	Width (W)	Height (H <sup>2</sup> )
With Light Source	15.70" (399 mm)	8.03" (204 mm)	12.46" (316 mm)
Without Light Source	14.09" (358 mm)	8.03" (204 mm)	12.46" (316 mm)

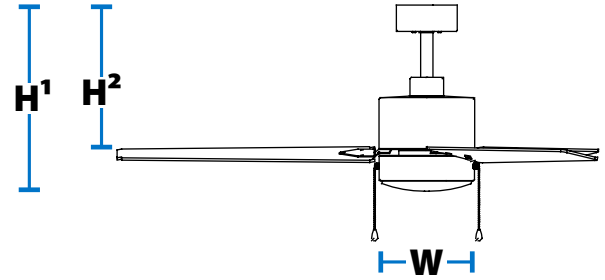

## Performance Data

Fan Motor Performance Data						
	RPM	Airflow High Speed	Fan Wattage	Airflow Efficiency		
3-BLADE	High: 189	3746 CFM	57W	78		
	Low: 92					
4-BLADE	High: 178	3880 CFM		57W	78	
	Low: 85					
5-BLADE	High: 174	3900 CFM			57W	78
	Low: 73					

Light Kit Performance Data						
Light Source	Lumens	Watts	Lumens/Watt	CCT	CRI	Dimmable
LED	1800	22W	81.81	3000K	90	Yes