


versatile™ 4C Surface Mount Collar, SM09D

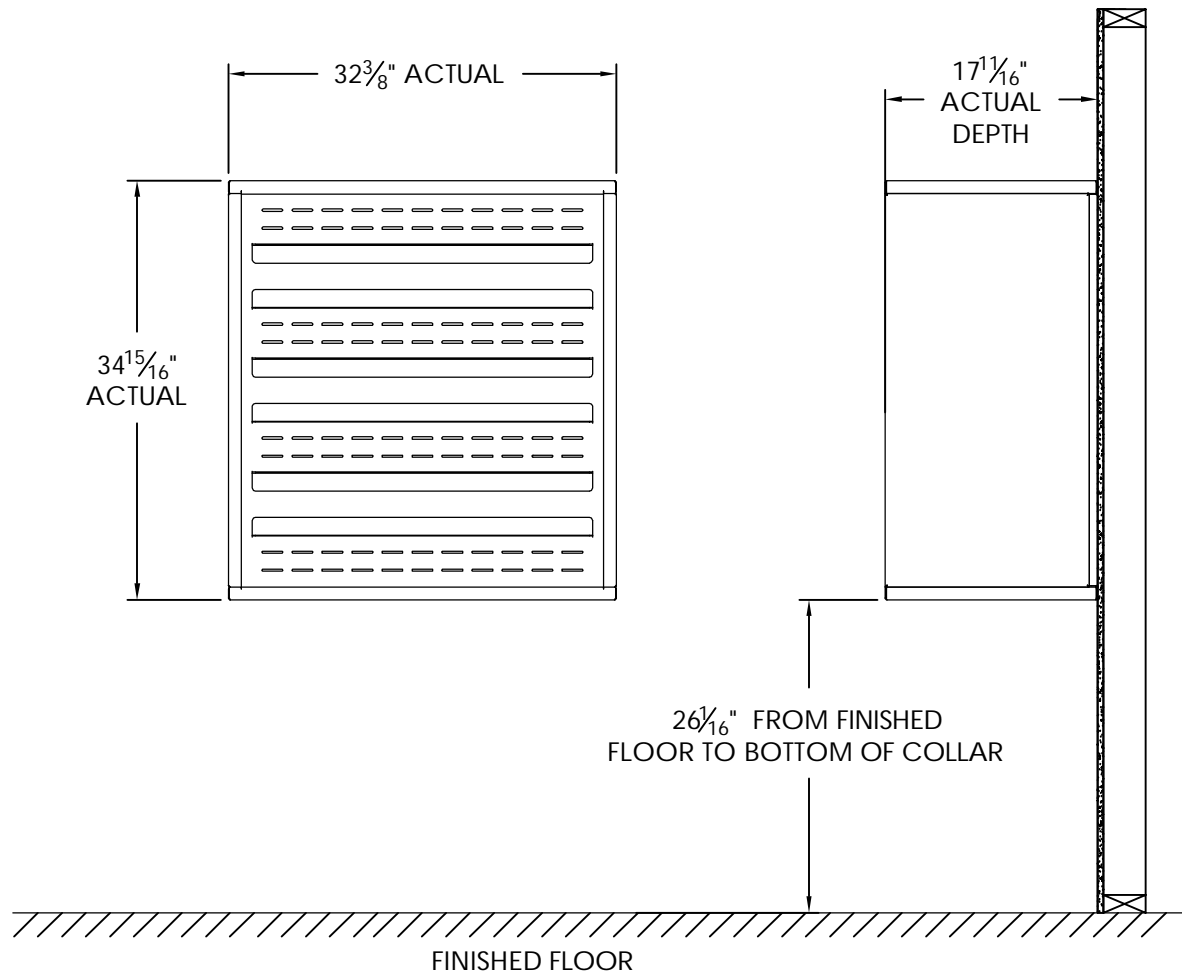

Notes:

1. Designed to mount Florence Versatile™ 4C mailbox double column 9-High Suite modules (sold separately).
2. For use with front loading modules only.

PRODUCT SERIES: VERSATILE™ 4C SURFACE MOUNT COLLAR


AF FLORENCE
manufacturing company

5935 Corporate Drive • Manhattan, KS 66503
www.florencemailboxes.com • (800) 275-1747

A GIBRALTAR INDUSTRIES COMPANY

| | | | |
|----------------|---------|---------------|-----------|
| MODEL | SM09D | REV | B |
| SCALE | NONE | LAST REV DATE | 7/02/2014 |
| DRAWING NUMBER | SM09DCS | DRAWN BY | TNS |

versatile™ 4C Mailbox, 4C09D-10

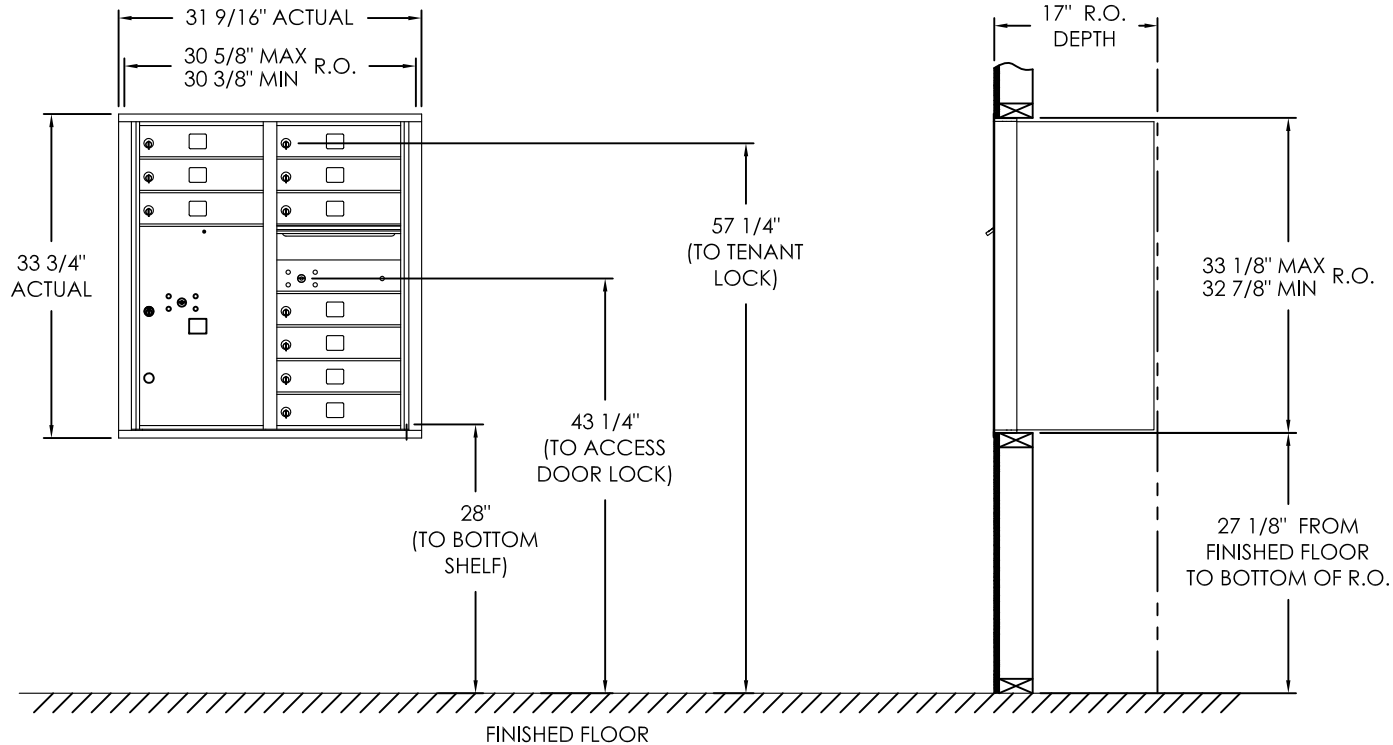

COMPARTMENT CHART

| DESCRIPTION | COMPARTMENT | COMPARTMENT SIZE | QTY. |
|---------------|-------------|---------------------------|------|
| MAILBOX | MB1 | 3" H x 12" W x 15" D | 10 |
| OUTGOING MAIL | OM2 | 6-1/2" H x 12" W x 15" D | 1 |
| PARCEL | PL6 | 20-1/2" H x 12" W x 15" D | 1 |

Notes:

- This module meets the USPS STD-4C requirements for installation defined below when the mailbox is installed per the dimensions provided on this drawing.
 - At least one customer compartment shall be positioned less than 48" above finished floor (AFF).
 - No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
 - No patron (tenant) lock shall be positioned more than 67" AFF.
 - No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
 - The USPS Arrow lock shall be positioned 36"- 48" AFF.
- This 4C mailbox can also be used for private applications.
- The rough opening width for multi-unit 4C installations is provided using the Florence configurator: www.florencemailboxes.com/configurator.

PRODUCT SERIES: VERSATILE™ 4C FRONT LOAD MAILBOX

FLORENCE
CORPORATION

5935 Corporate Drive • Manhattan, KS 66503
800.275.1747 • www.florencemailboxes.com

| | |
|---------------------------|------------------------|
| MODEL 4C09D-10 | REV D |
| SCALE NONE | LAST REV DATE 06/27/19 |
| DRAWING NUMBER 4C09D-10CS | DRAWN BY RAK |